


# Dropsafe Nets

The Dropsafe Nets are dropped object prevention devices, that reduce the risk of harm to people and critical equipment caused by items falling from height.


The Nets enclose and tether items and fixtures located at height (such as lights, speakers, horns, CCTV cameras, etc.) to prevent these items from becoming a dropped objects hazard (from impact, fatigue, corrosion, vibration or poor maintenance).




## Fixture Types




Floodlights




Fluorescent/  
LED Strip Lights




Nav/  
Strobe Lights



Speakers/  
Horns



CCTV  
Cameras



Self-Retracting  
Lifelines

## Quotations

Fixtures installed at height vary in shape, size, weight and mounting configuration. To select the correct part number from this product guide, or to make a new product enquiry, you must provide accurate information about your fixture(s). In order for us to provide an accurate quotation, you must follow the Ordering Process .

### WARNING




**The attachment structure must be strong enough to support the fixture if it drops.**

**Install Dropsafe Net only if:**

1. The distance between the fixture and the attachment point is:

- vertically less than 30 cm (12")
- horizontally less than 50 cm (20")

2. The net must be snug (not loose) around the fixture.

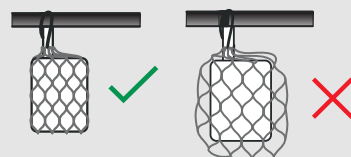

## Features



Designed and tested to over 5 times Safe Working Load (SWL)



Withstands extreme temperatures up to 500°C (932°F), down to -40°C (-40°F)



SUS/AISI 316 stainless steel wire and components



Available for a wide range of fixtures (custom designs also available)



3-year warranty



ABS approved for DOPP+ standard

# Dropsafe Nets - Ordering and Installation Process

You can order and install yourself or engage a Dropsafe approved 3<sup>rd</sup> party contractor.

## Ordering

### 3<sup>rd</sup> party ordering

1	Email us the facility address at <a href="mailto:net@dropsafe.com">net@dropsafe.com</a> and we will introduce the closest 3 <sup>rd</sup> party contractors in your area.
---	---







2	3 <sup>rd</sup> party contractor surveys your facility and sends report to you and us
---	---



4	We email you the “ <b>Quotation.</b> ” You then place an order for your selected Dropsafe Nets.
---	---

### Self-ordering

1	<p>Collect the following for each fixture type you intend to secure:</p> <ul style="list-style-type: none"><li>• Fixture weight including mounting bracket</li><li>• Fixture dimensions (Length, Width &amp; Height)</li><li>• Mounting configuration:</li></ul> <div style="display: flex; justify-content: space-around;"><div style="text-align: center;"><p><b>Side-mounted</b> Bracket along side of fixture</p></div><div style="text-align: center;"><p><b>Rear-mounted</b> Bracket facing rear of fixture</p></div><div style="text-align: center;"><p><b>Side-mounted</b> Bracket along side of fixture</p></div><div style="text-align: center;"><p><b>Rear-mounted</b> Bracket facing rear of fixture</p></div></div> <ul style="list-style-type: none"><li>• Perspective photo</li><li>• Fixture manufacturer &amp; model (optional)</li></ul>
---	---



2	<p>Reference product guide to match Net Part No. to your fixture types. To match a fixture to a Net Part No. from the product guide ensure that:</p> <ul style="list-style-type: none"><li>• Fixture weight incl. mounting bracket does not exceed the stated SWL</li><li>• One dimension size does not exceed the reference fixture by &gt;15%</li><li>• Two dimension sizes do not exceed the reference fixture by &gt;10%</li><li>• The mounting configuration matches the product guide reference</li></ul>
---	---



3	<p style="text-align: center;"><b>Match</b></p> <p>You complete the “<b>Request For Quotation Form</b>” (photocopy from Product Guide or download from <a href="http://www.dropsafe.com/resource-centre">www.dropsafe.com/resource-centre</a>) and email us at <a href="mailto:net@dropsafe.com">net@dropsafe.com</a>.</p>
---	--



3	<p style="text-align: center;"><b>No Match</b></p> <p>You complete the “<b>New Product Enquiry Form</b>” (photocopy from Product Guide or download from <a href="http://www.dropsafe.com/resource-centre">www.dropsafe.com/resource-centre</a>) and email us at <a href="mailto:net@dropsafe.com">net@dropsafe.com</a>.</p>
---	---



## Product Delivery

5	Your order is packed and labeled for each installation area.
---	--

## Installation

### 3<sup>rd</sup> Party Installation

6	Email us and we will introduce the closest 3 <sup>rd</sup> party installation contractors in your area.
---	---

### Self-Installation

6	We provide online training for your installation type. Installation instructions are also provided with the product.
---	--

# Dropsafe Nets - Request For Quotation Form

Complete this form if you know the required Net Part No. in the Product Guide. We must receive an accurate and complete form to provide a quotation.

Date: DD / MM / YYYY Company: \_\_\_\_\_ Facility: \_\_\_\_\_  
State / Province / Area: \_\_\_\_\_ Country: \_\_\_\_\_  
Contact Person: \_\_\_\_\_ Position: \_\_\_\_\_  
Email: \_\_\_\_\_ Phone: \_\_\_\_\_

## Instructions for completing table below

1 Select the Part No. from the Product Guide.

2 Enter Fixture Location on the facility.

3 Select the Mounting: Side or Rear-mounted and confirm mounting is no more than 30cm/50cm.

4 Enter Quantity.


5 Enter Fixture Manufacturer.

6 Enter Fixture Model.


7 Take a clear perspective photo of the fixture.

Enter the photo file name in the table and attach the photo to the email.

**Side-mounted**  
Bracket along side of fixture



**Rear-mounted**  
Bracket facing rear of fixture



Perspective photo example

1 Part No.	2 Fixture Location	3 Mounting	4 Quantity	5 Fixture Manufacturer	6 Fixture Model	7 Photo File Name
7500070	Hose storage area	<input type="checkbox"/> Rear <input checked="" type="checkbox"/> Side	20	Philips floodlight	LED 200W	IMG_195.JPG
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				
		<input type="checkbox"/> Rear <input type="checkbox"/> Side				

Installation options: ☐ 3<sup>rd</sup> party ☐ Self

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai  
☐ Singapore ☐ Norway ☐ Hong Kong

Please contact us at [net@dropsafe.com](mailto:net@dropsafe.com) for any questions.


Version 05/18

**Drop<sup>safe</sup>**  
Drops Prevention Technology

Date:     /     /     Company: \_\_\_\_\_ Facility: \_\_\_\_\_  
          DD   MM   YYYY  
State / Province / Area: \_\_\_\_\_ Country: \_\_\_\_\_  
Contact Person: \_\_\_\_\_ Position: \_\_\_\_\_  
Email: \_\_\_\_\_ Phone: \_\_\_\_\_

**1** Insert Fixture Type: A= Floodlight B= Fluorescent Light C= Nav/Strobe Light D= Speaker/Horn E= CCTV Camera  
F= Junction Box or Sensor Unit G= Self-Retracting Lifeline (SRL) H=Other

- 9** Take a clear perspective photo of the fixture.  
Enter the photo file name in the table and attach the photo to the email.

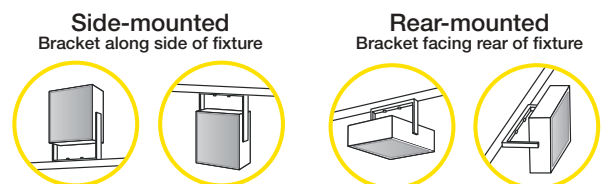

Perspective photo example

[illegible]

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai  
☐ Singapore ☐ Norway ☐ Hong Kong

Version 05/18

# Nets For Floodlights

## Part No.: 7500070




**Fixture Weight**  
SWL: 18.5 kg (41 lbs)

**Fixture Dimensions**  
A = 300 mm (11.8")  
B = 300 mm (11.8")  
C = 300 mm (11.8")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500070




**Fixture Specifications**  
SWL: 18.5 kg (41 lbs)

**Fixture Dimensions**  
A = 255 mm (10")  
B = 205 mm (8")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500085




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 610 mm (24")  
B = 330 mm (13")  
C = 330 mm (13")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500085




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 490 mm (19.3")  
B = 310 mm (12.2")  
C = 300 mm (11.8")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500090




**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 410 mm (16")  
B = 410 mm (16")  
C = 200 mm (8")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500091




**Fixture Weight**  
SWL: 35 kg (77 lbs)

**Fixture Dimensions**  
A = 740 mm (29")  
B = 590 mm (23")  
C = 280 mm (11")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500091




**Fixture Weight**  
SWL: 35 kg (77 lbs)

**Fixture Dimensions**  
A = 760 mm (30")  
B = 535 mm (21")  
C = 330 mm (13")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500095




**Fixture Weight**  
SWL: 40 kg (88 lbs)

**Fixture Dimensions**  
A = 820 mm (32.3")  
B = 410 mm (16")  
C = 194 mm (7.6")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500100




**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 460 mm (18")  
B = 375 mm (15")  
C = 280 mm (11")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500100




**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 460 mm (18")  
B = 460 mm (18")  
C = 265 mm (10.5")

**Mounting configuration**  
Rear-mounted

Net fits this way





# Nets For Floodlights

## Part No.: 7500100




**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 365 mm (14.3")  
B = 305 mm (12")  
C = 265 mm (10.5")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 535 mm (21")  
B = 460 mm (18")  
C = 165 mm (6.5")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 570 mm (22.4")  
B = 490 mm (19.3")  
C = 235 mm (9.3")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 530 mm (21")  
B = 385 mm (15")  
C = 280 mm (11")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 610 mm (24")  
B = 500 mm (19.7")  
C = 230 mm (9")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 455 mm (18")  
B = 405 mm (16")  
C = 280 mm (11")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500106




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 530 mm (21")  
B = 430 mm (17")  
C = 175 mm (7")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500107




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 600 mm (24")  
B = 420 mm (16.5")  
C = 160 mm (6.3")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500110




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 460 mm (18")  
B = 430 mm (17")  
C = 265 mm (10.5")

**Mounting configuration**  
Side-mounted

Net fits this way



## Part No.: 7500110




**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 450 mm (17.7")  
B = 400 mm (15.7")  
C = 265 mm (10.5")

**Mounting configuration**  
Side-mounted

Net fits this way



# Nets For Floodlights


## Part No.: 7500150



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 615 mm (24")  
B = 490 mm (19.5")  
C = 340 mm (13.5")

**Mounting configuration**  
Rear-mounted



Net fits this way


## Part No.: 7500150



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 600 mm (23.6")  
B = 400 mm (15.7")  
C = 400 mm (15.7")

**Mounting configuration**  
Rear-mounted



Net fits this way


## Part No.: 7500150



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 600 mm (23.6")  
B = 440 mm (17.3")  
C = 235 mm (9.3")

**Mounting configuration**  
Rear-mounted



Net fits this way


## Part No.: 7500152



**Fixture Weight**  
SWL: 35 kg (77 lbs)

**Fixture Dimensions**  
A = 600 mm (23.6")  
B = 600 mm (23.6")  
C = 340 mm (13.3")

**Mounting configuration**  
Side-mounted



Net fits this way


## Part No.: 7500155



**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 570 mm (22.4")  
B = 420 mm (16.5")  
C = 450 mm (17.7")

**Mounting configuration**  
Side-mounted



Net fits this way


## Part No.: 7500180



**Fixture Weight**  
SWL: 48 kg (106 lbs)

**Fixture Dimensions**  
A = 620 mm (24.5")  
B = 490 mm (19.5")  
C = 510 mm (20")

**Mounting configuration**  
Side-mounted



Net fits this way


## Part No.: 7500185



**Fixture Weight**  
SWL: 48 kg (106 lbs)

**Fixture Dimensions**  
A = 690 mm (27")  
B = 690 mm (27")  
C = 310 mm (12")

**Mounting configuration**  
Side-mounted



Net fits this way


## Part No.: 7500185



**Fixture Weight**  
SWL: 48 kg (106 lbs)

**Fixture Dimensions**  
A = 610 mm (24")  
B = 530 mm (21")

**Mounting configuration**  
Side-mounted



Net fits this way


## Part No.: 7500190



**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 400 mm (15.7")  
B = 200 mm (8")  
C = 150 mm (6")

**Mounting configuration**  
Rear-mounted



Net fits this way


## Part No.: 7500320



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 560 mm (22")  
B = 215 mm (8.5")

**Mounting configuration**  
Rear-mounted



Net fits this way

# Nets For Floodlights


## Part No.: 7500325



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 635 mm (25")  
B = 280 mm (11")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500327



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 580 mm (22.8")  
B = 510 mm (20")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500327



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 610 mm (24")  
B = 300 mm (11.8")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500327



**Fixture Weight**  
SWL: 25 kg (55 lbs)

**Fixture Dimensions**  
A = 460 mm (18")  
B = 430 mm (17")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500330



**Fixture Weight**  
SWL: 27 kg (59.5 lbs)

**Fixture Dimensions**  
A = 700 mm (27.6")  
B = 420 mm (16.5")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500331



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 355 mm (14")  
B = 275 mm (10.8")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500335



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 406 mm (15.9")  
B = 83 mm (3.3")

**Mounting configuration**  
Side-mounted  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500336



**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 270 mm (10.6")  
B = 270 mm (10.6")  
C = 180 mm (7")

**Mounting configuration**  
Rear-mounted



↗  
Net fits this way


## Part No.: 7500336



**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 120 mm (4.7")  
B = 320 mm (12.6")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500338



**Fixture Weight**  
SWL: 26 kg (57 lbs)

**Fixture Dimensions**  
A = 350 mm (13.8")  
B = 310 mm (12.2")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way



# Nets For Fluorescent/LED Strip Lights


## Part No.: 7500610



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 1840 mm (72.5")  
B = 110 mm (4.3")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500620



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 740 mm (29")  
B = 210 mm (8.3")  
C = 150 mm (6")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500625



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 750 mm (29.4")  
B = 170 mm (6.8")  
C = 95 mm (4")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500626



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 445 mm (17.5")  
B = 54 mm (2.1")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500627



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 1059 mm (41.7")  
B = 54 mm (2.1")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500628



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 1380 mm (54.3")  
B = 54 mm (2.1")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500630



**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 900 mm (35.5")  
B = 190 mm (7.5")  
C = 130 mm (5.1")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500635



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 900 mm (35.5")  
B = 170 mm (6.8")  
C = 95 mm (4")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500640



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 1320 mm (52")  
B = 190 mm (7.5")  
C = 140 mm (5.5")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500640



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 1360 - 1500 mm (53.5-59")  
B = 190 mm (7.5")  
C = 130 mm (5")

**Mounting configuration**  
Rear-mounted



# Nets For Fluorescent/LED Strip Lights


## Part No.: 7500640



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 1350 mm (53")  
B = 210 mm (8.5")  
C = 150 mm (6")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500640



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 1385 mm (54.5")  
B = 165 mm (6.5")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500645



**Fixture Weight**  
SWL: 24 kg (53 lbs)

**Fixture Dimensions**  
A = 1350 mm (53")  
B = 170 mm (6.8")  
C = 95 mm (4")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500650



**Fixture Weight**  
SWL: 32 kg (71 lbs)

**Fixture Dimensions**  
A = 1350 - 1500 mm (53 - 59")  
B = 230 mm (9")  
C = 160 mm (6.5")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500650



**Fixture Weight**  
SWL: 32 kg (71 lbs)

**Fixture Dimensions**  
A = 1610 mm (63.5")  
B = 170 mm (6.8")  
C = 105 mm (4")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500655



**Fixture Weight**  
SWL: 24 kg (53 lbs)

**Fixture Dimensions**  
A = 1500 mm (59")  
B = 170 mm (6.8")  
C = 95 mm (4")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500670



**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 1350 mm (53")  
B = 160 mm (6.3")  
C = 130 mm (5.1")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


## Part No.: 7500670



**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 1350 mm (53")  
B = 300 mm (12")  
C = 180 mm (7")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way

# Nets For Speakers/Horns

## Part No.: 7500070




**Fixture Weight**  
SWL: 18.5 kg (41 lbs)

**Fixture Dimensions**  
A = 340 mm (13.4")  
B = 250 mm (9.8")

**Mounting configuration**  
Side-mounted

Net fits  
this way




## Part No.: 7500320



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 420 mm (16.5")  
B = 340 mm (13.4")  
C = 200 mm (8")

**Mounting configuration**  
Rear-mounted



Net fits  
this way

## Part No.: 7500750




**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 255 mm (10")  
B = 205 mm (8")

**Mounting configuration**  
Side-mounted

Net fits  
this way



## Part No.: 7500815




**Fixture Weight**  
SWL: 6 kg (13 lbs)

**Fixture Dimensions**  
A = 215 mm (8.5")  
B = 140 mm (5.5")  
C = 140 mm (5.5")

**Mounting configuration**  
Side-mounted

Net fits  
this way




## Part No.: 7500820



**Fixture Weight**  
SWL: 6 kg (13 lbs)

**Fixture Dimensions**  
A = 380 mm (15")  
B = 260 mm (10.5")  
C = 200 mm (8")

**Mounting configuration**  
Rear-mounted



Net fits  
this way


## Part No.: 7500860



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 590 mm (21.6")  
B = 380 mm (7.4")  
C = 250 mm (8.8")

**Mounting configuration**  
Rear-mounted



Net fits  
this way

## Part No.: 7500930




**Fixture Weight**  
SWL: 10 kg (22 lbs)

**Fixture Dimensions**  
A = 245 mm (9.6")  
B = 165 mm (6.5")

**Mounting configuration**  
Side-mounted

Net fits  
this way




## Part No.: 7500931



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 550 mm (21.7")  
B = 190 mm (7.4")  
C = 225 mm (8.8")

**Mounting configuration**  
Rear-mounted



Net fits  
this way

# Nets For Navigation/Strobe Lights

## Part No.: 7500320




**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 510 mm (20")  
B = 215 mm (8.5")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500720




**Fixture Weight**  
SWL: 4 kg (8.8 lbs)

**Fixture Dimensions**  
A = 220 mm (8.7")  
B = 140 mm (5.5")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500730




**Fixture Weight**  
SWL: 5 kg (11 lbs)

**Fixture Dimensions**  
A = 240 mm (9.5")  
B = 210 mm (8.3")

**Mounting configuration**  
Rear-mounted

Net fits this way




## Part No.: 7500750



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 400 mm (15.7")  
B = 200 mm (8")

**Mounting configuration**  
Rear-mounted



Net fits this way



## Part No.: 7500760




**Fixture Weight**  
SWL: 30 kg (66 lbs)

**Fixture Dimensions**  
A = 495 mm (19.5")  
B = 495 mm (19.5")  
C = 420 mm (16.5")  
D = 150 mm (6")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500780




**Fixture Weight**  
SWL: 65 kg (143 lbs)

**Fixture Dimensions**  
A = 980 mm (38.6")  
B = 560 mm (22")  
C = 560 mm (22")  
D = 150 mm (6")

**Mounting configuration**  
Rear-mounted

Net fits this way



## Part No.: 7500793




**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 485 mm (19")  
B = 360 mm (14.2")

**Mounting configuration**  
Rear-mounted

Net fits this way



Net fits this way

# Nets For CCTV Cameras


## Part No.: 7500930




**Fixture Weight**  
SWL: 10 kg (22 lbs)

**Fixture Dimensions**  
A = 220 mm (8.7")  
B = 220 mm (8.7")  
C = 170 mm (6.7")

**Mounting configuration**  
Side-mounted




## Part No.: 7500941



**Fixture Weight**  
SWL: 5 kg (11 lbs)

**Fixture Dimensions**  
A = 300 mm (11.8")  
B = 100 mm (4")

**Mounting configuration**  
Side-mounted




## Part No.: 7500942



**Fixture Weight**  
SWL: 5 kg (11 lbs)

**Fixture Dimensions**  
A = 210 mm (8.3")  
B = 180 mm (7")  
C = 130 mm (5.1")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500945



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 500 mm (19.7")  
B = 140 mm (5.5")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500946



**Fixture Weight**  
SWL: 19 kg (42 lbs)

**Fixture Dimensions**  
A = 325 mm (12.7")  
B = 310 mm (12.2")  
C = 220 mm (8.7")

**Mounting configuration**  
Side-mounted




## Part No.: 7500947



**Fixture Weight**  
SWL: 18 kg (40 lbs)

**Fixture Dimensions**  
A = 430 mm (17")  
B = 168 mm (6.6")  
C = 160 mm (6.3")

**Mounting configuration**  
Side-mounted




## Part No.: 7500948



**Fixture Weight**  
SWL: 10 kg (22 lbs)

**Fixture Dimensions**  
A = 460 mm (18.1")  
B = 190 mm (7.5")  
C = 130 mm (5.1")

**Mounting configuration**  
Side-mounted




## Part No.: 7500949



**Fixture Weight**  
SWL: 17 kg (37.5 lbs)

**Fixture Dimensions**  
A = 250 mm (9.8")  
B = 100 mm (4.0")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500950



**Fixture Weight**  
SWL: 5 kg (11 lbs)

**Fixture Dimensions**  
A = 325 mm (12.8")  
B = 240 mm (9.4")  
C = 170 mm (6.7")

**Mounting configuration**  
Rear-mounted




## Part No.: 7500951



**Fixture Weight**  
SWL: 8 kg (18 lbs)

**Fixture Dimensions**  
A = 260 mm (10.2")  
B = 210 mm (8.3")  
C = 140 mm (5.5")

**Mounting configuration**  
Rear-mounted





## Nets For CCTV Cameras


### Part No.: 7500952



**Fixture Weight**  
SWL: 18 kg (40 lbs)

**Fixture Dimensions**  
A = 295 mm (11.60")  
B = 220 mm (8.66")  
C = 165 mm (6.50")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


### Part No.: 7500952



**Fixture Weight**  
SWL: 18 kg (40 lbs)

**Fixture Dimensions**  
A = 338 mm (13.30")  
B = 220 mm (8.66")  
C = 165 mm (6.50")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


### Part No.: 7500954



**Fixture Weight**  
SWL: 10 kg (22 lbs)

**Fixture Dimensions**  
A = 480 mm (18.9")  
B = 176 mm (7")

**Mounting configuration**  
Side-mounted



↗  
Net fits this way

## Nets For Self-Retracting Lifelines


### Part No.: 7500201



**Fixture Weight**  
SWL: 40 kg (88 lbs)

**Fixture Dimensions**  
A = 295 mm (11.6")  
B = 150 mm (6")  
C = 90 mm (3.5")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


### Part No.: 7500203



**Fixture Weight**  
SWL: 50 kg (110 lbs)

**Fixture Dimensions**  
A = 350 mm (13.8")  
B = 200 mm (8")  
C = 165 mm (6.5")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


### Part No.: 7500205



**Fixture Weight**  
SWL: 60 kg (132 lbs)

**Fixture Dimensions**  
A = 475 mm (18.7")  
B = 280 mm (11")  
C = 185 mm (7.3")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


### Part No.: 7500208



**Fixture Weight**  
SWL: 18 kg (40 lbs)

**Fixture Dimensions**  
A = 170 mm (6.7")  
B = 100 mm (3.9")  
C = 56 mm (2.2")

**Mounting configuration**  
Rear-mounted



↑  
Net fits this way


# Nets For Pipe Clamps

## Part No.: 7500219



**Fixture Weight**  
SWL: 20 kg (44 lbs)

**Fixture Dimensions**  
A = 380 mm (15")  
B = 285 mm (11")  
C = 120 mm (5")




## Part No.: 7500220




**Fixture Weight**  
SWL: 15 kg (33 lbs)

**Fixture Dimensions**  
A = 280 mm (11")  
B = 255 mm (10")  
C = 100 mm (4")




## Part No.: 7500221



**Fixture Weight**  
SWL: 10 kg (22 lbs)

**Fixture Dimensions**  
A = 152 mm (6")  
B = 130 mm (5")  
C = 60 mm (2")




## Part No.: 7500222



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 115 mm (4.5")  
B = 100 mm (4.3")  
C = 45 mm (1.8")




## Part No.: 7500223



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 70 mm (2.8")  
B = 56 mm (2.2")  
C = 30 mm (1.2")




## Part No.: 7500224




**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 55 mm (2.2")  
B = 40 mm (1.6")  
C = 30 mm (1.2")




## Part No.: 7500225



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 115 mm (4.5")  
B = 97 mm (3.8")  
C = 45 mm (1.8")




## Part No.: 7500226




**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 206 mm (6.6")  
B = 178 mm (7")  
C = 80 mm (3.1")




## Part No.: 7500227




**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 250 mm (9.8")  
B = 210 mm (8.2")  
C = 90 mm (3.5")




## Part No.: 7500228




**Fixture Weight**  
SWL: 8 kg (17.6 lbs)

**Fixture Dimensions**  
A = 206 mm (6.6")  
B = 178 mm (7")  
C = 160 mm (6.3")




# Nets For Pipe Clamps

Part No.: 7500229



**Fixture Weight**  
SWL: 8 kg (17.6 lbs)


**Fixture Dimensions**  
A = 250 mm (9.8")  
B = 210 mm (8.2")  
C = 180 mm (7.1")



Net fits this way


# Nets For Anode

Part No.: 7500390



**Fixture Weight**  
SWL: 15 kg (33 lbs)


**Fixture Dimensions**  
A = 1525 mm (60")  
B = 65 mm (2.5")  
C = 65 mm (2.5")



Net fits this way

# Nets For Junction Boxes, Heat, Smoke & CO<sub>2</sub> Detectors


Part No.: 7500311



**Fixture Weight**  
SWL: 1 kg (2.2 lbs)


**Fixture Dimensions**  
A = 120 mm (4.7")  
B = 70 mm (2.8")

**Mounting configuration**  
Rear-mounted



Net fits this way


Part No.: 7500311



**Fixture Weight**  
SWL: 1 kg (2.2 lbs)


**Fixture Dimensions**  
A = 130 mm (5.1")  
B = 130 mm (5.1")  
C = 80 mm (3.1")

**Mounting configuration**  
Rear-mounted



Net fits this way


Part No.: 7500316



**Fixture Weight**  
SWL: 5 kg (11 lbs)


**Fixture Dimensions**  
A = 150 mm (5.9")  
B = 150 mm (5.9")  
C = 110 mm (4.3")

**Mounting configuration**  
Rear-mounted



Net fits this way


Part No.: 7500317



**Fixture Weight**  
SWL: 5 kg (11 lbs)

**Fixture Dimensions**  
A = 150 mm (5.9")  
B = 150 mm (5.9")  
C = 150 mm (5.9")

**Mounting configuration**  
Rear-mounted



Net fits this way


## Nets For Crane Boom Stoppers

**Part No.: 7500340**



**Fixture Weight**  
SWL: 35 kg (77 lbs)

**Fixture Dimensions**  
A = 965 mm (36")  
B = 150 mm (6")



Net fits  
this way


## Nets For Crown Block Stoppers

**Part No.: 7500451**



**Fixture Weight**  
SWL: 50 kg (110 lbs)

**Fixture Dimensions**  
A = 1370 mm (54")  
B = 405 mm (16")  
C = 190 mm (7.5")




Net fits  
this way

## Nets For Bend Restrictors

**Part No.: 7500420**



**Fixture Dimensions**  
A = 9145 mm (360")  
B = 485 mm (19")



Net fits  
this way

**Drop<sup>safe</sup>**  
Drops Prevention Technology

Date:    /    /    Company: \_\_\_\_\_ Facility: \_\_\_\_\_  
          DD   MM   YYYY  
State / Province / Area: \_\_\_\_\_ Country: \_\_\_\_\_  
Contact Person: \_\_\_\_\_ Position: \_\_\_\_\_  
Email: \_\_\_\_\_ Phone: \_\_\_\_\_

Dropsafe Safety products are designed to enable safe working practices to enhance work place safety. Please ensure you have read the requirements for each product before completing this form.

**2** Enter the Quantity.

[illegible]

Please contact us at [products@dropsafe.com](mailto:products@dropsafe.com) for any questions.



# Dropsafe Barricades


The Dropsafe Barricade is a work site safety management system.

The Barricade is the only versatile and fully customisable system designed to install in any type of access and work area.


The Barricade system's flexibility enables good housekeeping practices, providing a safer working environment for your personel.




## Installation Types

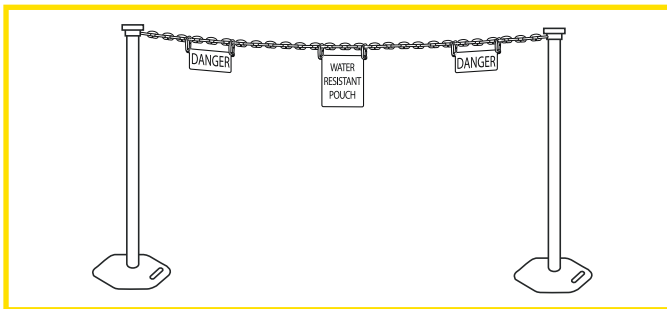


Free Standing

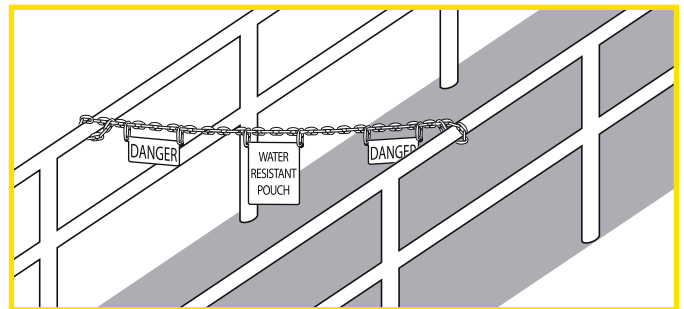

Wrap Attachment

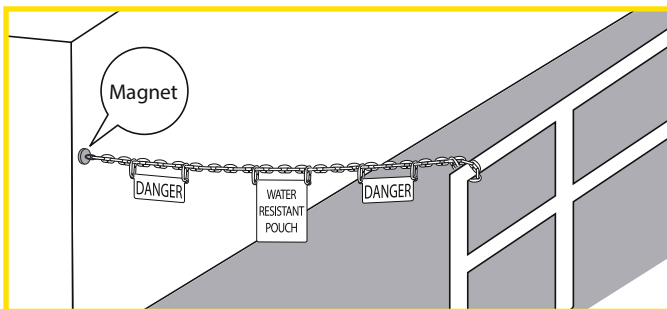

Magnet Attachment

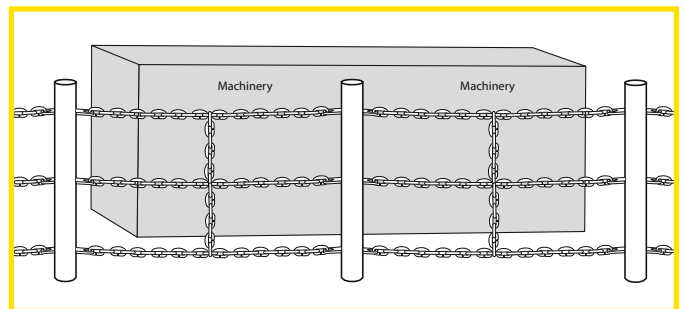

Barricade Fence

## Quotations

The Barricade can be used for different applications throughout a facility. The system has multiple attaching options, customisable chain lengths, modular signage and a modular weather resistant documentation pouch. When selecting Barricade components, consider the different areas the Barricade can be used at your facility and the required attachment scenarios. To order, complete the **“General RFQ Form”** (photocopy from Product Guide or download from [www.dropsafe.com/resource-centre](http://www.dropsafe.com/resource-centre)) and email us at [products@dropsafe.com](mailto:products@dropsafe.com).

## Features



Suitable for harsh environments



Durable weatherproof and reflective document pouch



Customisable chain length and multiple installation options



Durable weatherproof and reflective document pouch



Attachable DANGER and CAUTION signs



Magnetic hooks to connect the chain to metal structures

# Dropsafe Barricades - Products

**Part No.: S011002100001**



## **Barricade Set**

Colour: Yellow/Black

Units per pack:

- 2x Barricade Post
- 4m Barricade Chain
- 2x CAUTION Sign
- 1x Reflective Pouch Unit

**Part No.: S011002100002**



## **Barricade Set**

Colour: Red/White

Units per pack:

- 2x Barricade Post
- 4m Barricade Chain
- 2x DANGER Sign
- 1x Reflective Pouch Unit

**Part No.: S011002100101**




## **Post**

Colour: Yellow

Units per pack:

- 2x Post

**Part No.: S011002100102**



## **Post**

Colour: Red

Units per pack:

- 2x Post

**Part No.: S011002100401**



## **Chain**

Colours: Yellow/Black

Units per pack:

- 20m Barricade Chain

**Part No.: S011002100402**



## **Chain**

Colours: Red/White

Units per pack:

- 20m Barricade Chain

**Part No.: S011002100701**



## **Signage**

Colour: Yellow

Units per pack:

- 5x CAUTION Sign

**Part No.: S011002100702**



## **Signage**

Colour: Red

Units per pack:

- 5x DANGER Sign

**Part No.: S011002100501**



## **Sleeve**

Units per pack:

- 5x Reflective Pouch

**Part No.: S011002100601**



## **Magnet**

Units per pack:

- 10x Magnet


# Dropsafe Pouches

Dropsafe Pouches are safety securing devices designed to secure handheld items used at height (such as two-way radios, portable gas detectors, aerosol spray cans and multimeters).

The Pouch fully encloses the item being secured and tethers the item to the user, preventing it from becoming a dropped or falling objects hazard.



## Application

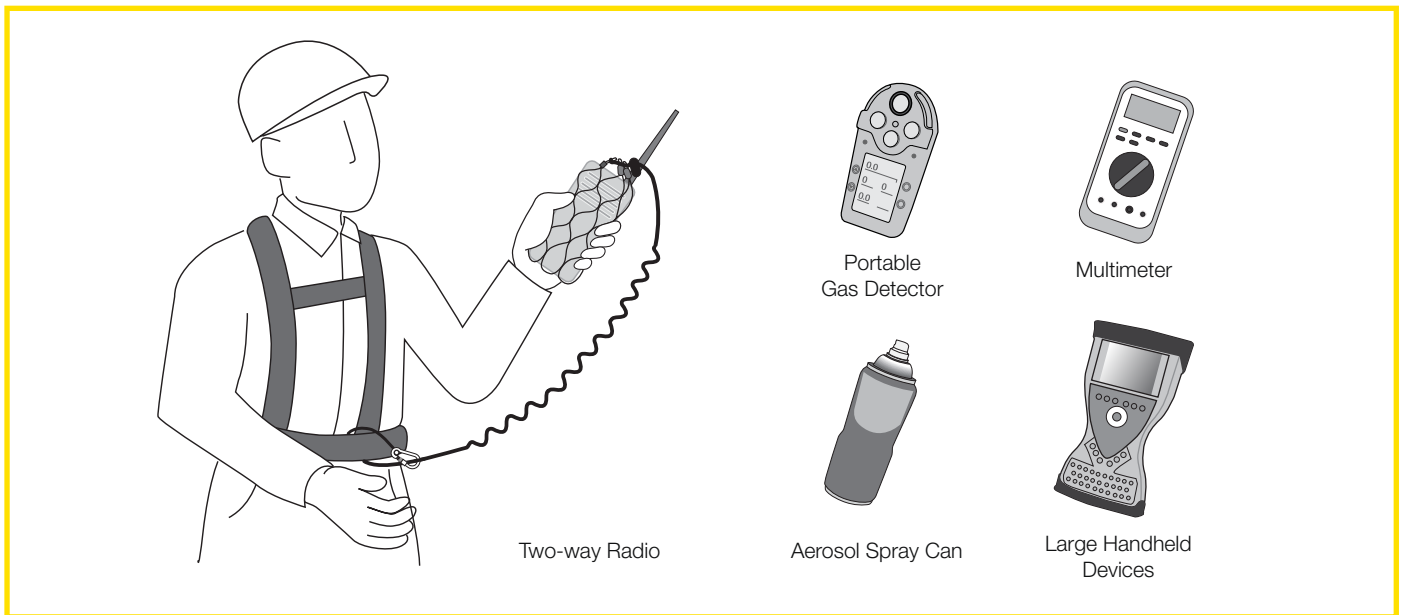

## Quotations

Hand held items used at height vary in shape, size and weight. Ensure the items you intend to secure with the Pouch meet the specifications of the Part No. you select. To order, complete the “**General RFQ Form**” (photocopy from Product Guide or download from [www.dropsafe.com/resource-centre](http://www.dropsafe.com/resource-centre)) and email us at [products@dropsafe.com](mailto:products@dropsafe.com).

## Features



Designed and tested to over 2.5 times Safe Working Load (SWL)



SUS/AISI 316 stainless steel wire and components



TPU coated wires



Comes with heavy duty belt clip



Available in a range of sizes (custom designs also available)


# Dropsafe Pouches - Products

## Part No.: S012001100701



**Fixture Specifications**  
SWL: 750 g (1.65 lbs)

A = 60 - 150 mm  
(2.4" - 5.9")  
B (Min. circumference)  
= 140 mm (6.6")




↑  
Net fits  
this way

## Part No.: S012002100001



**Fixture Specifications**  
SWL: 1 kg (2.2 lbs)

A = 150 - 250 mm  
(5.9" - 9.8")  
B (Min. circumference)  
= 210 mm (8.3")



↑  
Net fits  
this way


## Part No.: S012003100001



Large Handheld Devices

**Fixture Specifications**  
SWL: 1 kg (2.2 lbs)


A = 245 mm (9.6")  
B = 125 mm (4.9")  
C = 45 mm (1.7")




↑  
Net fits  
this way

# Dropsafe Accessories


Designed for use in harsh offshore and onshore environments, Dropsafe accessories provide application specific solutions to reduce dropped object risks.

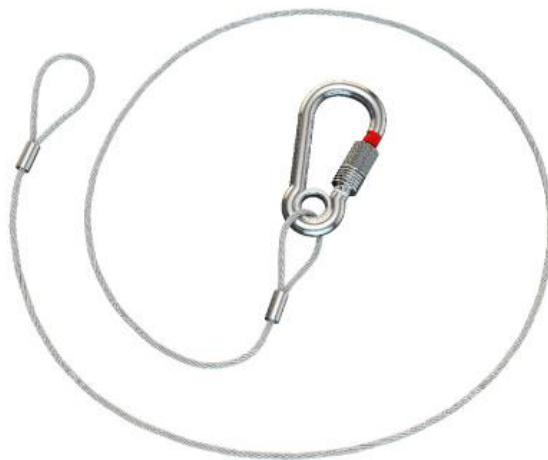


## Application Types

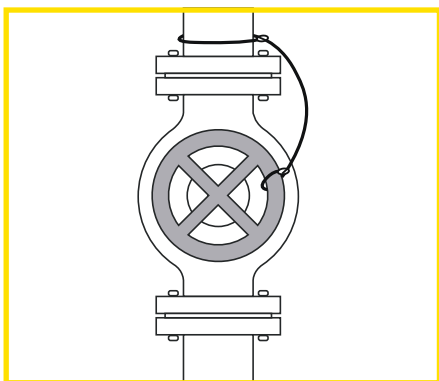

Valve Handle

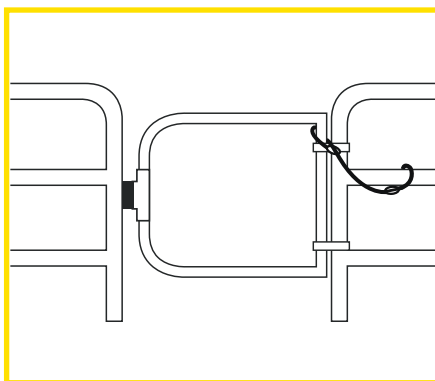

Swing Gate

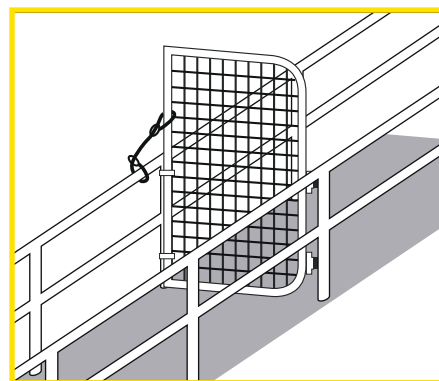

Access Gate

## Quotations

It is important that you consider actual safety securing requirements and best practices when selecting Dropsafe Accessories. To order, complete the **“General RFQ Form”** (Photocopy from Product Guide or download from [www.dropsafe.com/resource-centre](http://www.dropsafe.com/resource-centre)) and email us at [products@dropsafe.com](mailto:products@dropsafe.com).

### IMPORTANT Dropped Object Prevention Best Practice

Use Dropsafe Nets as the best practice method of secondary retention (instead of wire or web slings). The Dropsafe 5X SWL, SUS316 nets fully enclose and tether the fixture and components, whereas slings do not fully retain the item being secured.

The light fixtures in these photos were retained using Dropsafe Nets, significantly reducing the risk of injury to personnel. This would not have been possible with a sling.



Crane boom light after collision



Light shade and impact guard dislodged due to corrosion

## Features



SUS/AISI 316 stainless steel wire and components



Designed and tested to over 5 times Safe Working Load (SWL)



Carabiner with spring-loaded gate nut and safety indicator



# Dropsafe Accessories - Products

## Part No.: S014002141001



### Lanyard + Carabiner

SWL: 1 kg (2.2 lbs)

A (Extended) =  
1100 mm (43.3")  
B = 70 mm (2.7")

Wire rope + Coating Ø =  
3 mm  
Carabiner Ø = 7 mm



## Part No.: S028005152001




### Carabiner

SWL: 80 kg (176 lbs)

A = 70 mm (2.7")  
B = 35 mm (1.4")

Carabiner Ø = 7 mm



## Part No.: S014002153001




### Cable & Carabiner

SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm  
Carabiner Ø = 7 mm



## Part No.: S014002153101




### Cable & Carabiner

SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm  
Carabiner Ø = 7 mm



## Part No.: S014001153301




### Cable

SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm



## Part No.: S014001153401




### Cable

SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm



## Part No.: S014002153501




### Cable & 2 Carabiners

SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm  
Carabiner Ø = 7 mm



## Part No.: S014002153601




### Cable & 2 Carabiners

SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")  
B = 70 mm (2.7")

Wire rope Ø = 3 mm  
Carabiner Ø = 7 mm



## Part No.: S014002154001




### Padlock

SWL: 80 kg (176 lbs)

A = 1000 mm (39.4")  
B = 70 mm (2.7")  
C = 53 mm (2.0")  
D = 40 mm (1.6")  
E = 32 mm (1.2")

Wire rope Ø = 3 mm  
Padlock Shackle Ø = 7 mm



# Protecting Your People

## Asia Pacific

☎ +852 3664 8350 Hong Kong (Head Office)  
☎ +800 492 2411 Singapore  
✉ info@dropsafe.com

## Australia

☎ 1 800 821 649  
✉ australia@dropsafe.com

## USA & Canada

☎ 1 866 299 2294  
✉ usa@dropsafe.com  
✉ canada@dropsafe.com

## Europe

☎ +0 800 015 9709  
✉ europe@dropsafe.com

## Middle East & Africa

☎ +971 4 328 4855  
✉ middleeast@dropsafe.com

## Brazil

✉ brazil@dropsafe.com

Dropsafe is a proud member of:



**Dropsafe®**  
Drops Prevention Technology